

**FICHAS TECNICAS
DE LOS
PRINCIPALES
EQUIPOS**



N-Type ABC Mono-glass Module

AIKO-A-MAH72Mw

Up to **24.0%**
600W-620W



Product
Warranty



Performance
Warranty



reddot winner 2023

Premium Appearance

No grid lines on the front

Higher Power Output

Higher efficiency: 24.0%

Lower degradation: 1 year $\leq 1.0\%$, 2 - 30 year $\leq 0.35\%$

Better temperature coefficient: $-0.29\%/^{\circ}\text{C}$

Optimized Balance of System (BOS)

Significant savings on mounting structure, cabling, and labour cost

Complete Set of Quality Management System

IEC 61730 (2016) IEC 61215 (2021)

ISO 9001:2015 Quality Management System

ISO 14001:2015 Environmental Management System

ISO 45001:2018 Occupational Safety and Management System



Munich RE



N-Type ABC Mono-glass Module

AIKO-A-MAH72Mw

620W Output **24.0%** Efficiency **≤1%** First-year Degradation **≤0.35%** Annual Degradation from Year 2-30

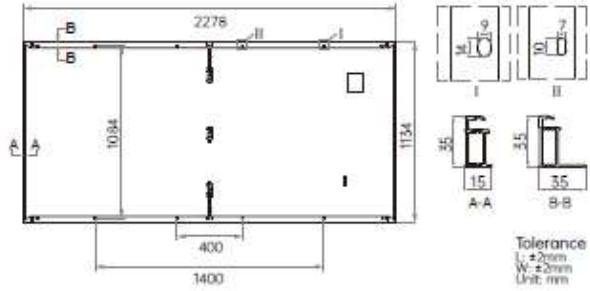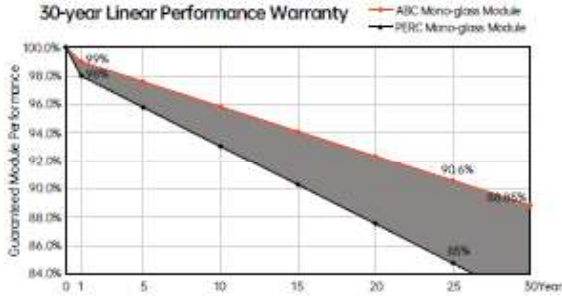

Electrical Characteristics (STC: AM1.5 1000W/m ² 25°C, NOCT: AM1.5 800W/m ² 20°C 1m/s)											Power Tolerance: 0 - +3%	
Model	AIKO-A600-MAH72Mw		AIKO-A605-MAH72Mw		AIKO-A610-MAH72Mw		AIKO-A615-MAH72Mw		AIKO-A620-MAH72Mw		STC	NOCT
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	600	452	605	456	610	459	615	463	620	467		
V _{oc} [V]	53.94	50.94	54.04	51.03	54.14	51.13	54.24	51.22	54.34	51.32		
V _{mp} [V]	44.67	42.18	44.77	42.28	44.87	42.37	44.97	42.47	45.07	42.56		
I _{sc} [A]	14.12	11.42	14.18	11.47	14.24	11.52	14.30	11.56	14.36	11.61		
I _{mp} [A]	13.44	10.72	13.52	10.79	13.60	10.85	13.68	10.92	13.76	10.98		
Module Efficiency	23.2%		23.4%		23.6%		23.8%		24.0%			

Mechanical Specification	
Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) 350mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, three bypass diodes
Connector	MC4 compatible
Weight	28.2kg±3%
Dimension	2278*1134*35mm
Package Detail	31pcs per pallet/155 pcs per 20' GP/620pcs per 40' HQ

Temperature Ratings (STC)	
Temperature Coefficient of I _{sc}	+ 0.05%/°C
Temperature Coefficient of V _{oc}	- 0.24%/°C
Temperature Coefficient of P _{max}	- 0.29%/°C

Installation Guide	
Operation Temperature	- 40°C +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	25 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO Energy reserves right to update the specification without notice
AEWHS_EN_202507_V5.1

SUN2000-100KTL-M2 Smart PV Controller



10
MPP Trackers



98.8% (@480V)
Max. Efficiency



String-level
Management



Smart I-V Curve Diagnosis
Supported



MBUS
Supported





Support AFCI &
Smart String Level
Disconnecter



Surge Arresters for
DC & AC



IP66
Protection

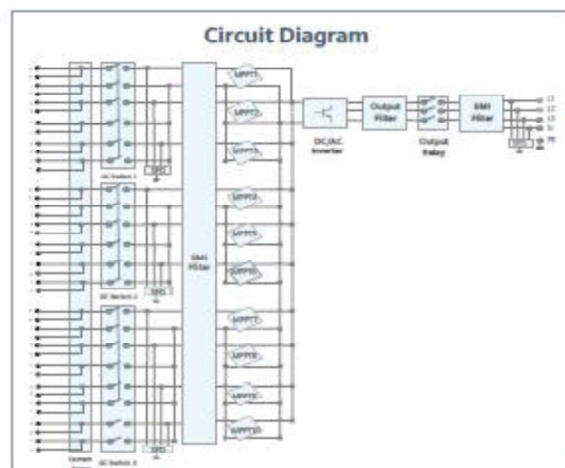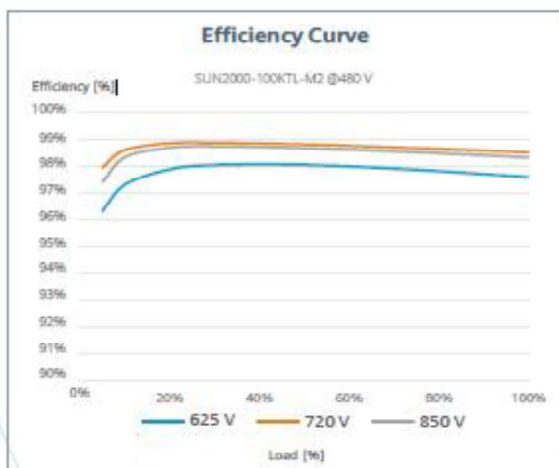

SUN2000-100KTL-M2
Technical Specification

Technical Specification		SUN2000-100KTL-M2
Efficiency		
Max. efficiency		98.6% @ 400 V, 98.8% @ 480 V
European efficiency		98.4% @ 400 V, 98.6% @ 480 V
Input		
Max. Input Voltage ¹		1,100 V
Max. Current per MPPT		30 A
Max. Current per Input		20 A
Max. Short Circuit Current per MPPT		40 A
Start Voltage		200 V
MPPT Operating Voltage Range ²		200 V ~ 1,000 V
Nominal Input Voltage		600 V @ 400 Vac, 720 V @ 480 Vac
Number of MPP trackers		10
Max. input number per MPP tracker		2
Output		
Nominal AC Active Power		100,000 W
Max. AC Apparent Power		110,000 VA
Max. AC Active Power (cosφ=1)		110,000 W
Nominal Output Voltage		400 V/ 480 V, 3W+(N)+PE
Rated AC Grid Frequency		50 Hz / 60 Hz
Nominal Output Current		144.4 A @ 400 V, 120.3 A @ 480 V
Max. Output Current		160.4 A @ 400 V, 133.7 A @ 480 V
Adjustable Power Factor Range		0.8 leading.. 0.8 lagging
Max. Total Harmonic Distortion		< 3%
Protection		
Input-side Disconnection Device		Yes
Anti-Islanding Protection		Yes
AC Overcurrent Protection		Yes
DC Reverse-polarity Protection		Yes
PV-array String Fault Monitoring		Yes
DC Surge Arrester		Type II
AC Surge Arrester		Type II
DC Insulation Resistance Detection		Yes
Residual Current Monitoring Unit		Yes
Arc Fault Protection		Yes
Smart String Level Disconnect		Yes
Communication		
Display		LED indicators; WLAN adaptor + FusionSolar APP
RS485		Yes
USB		Yes
Smart Dongle-4G		4G / 3G / 2G via Smart Dongle - 4G (Optional)
Monitoring BUS (MBUS)		Yes (isolation transformer required)
General Data		
Dimensions (W x H x D)		1,035 x 700 x 365 mm
Weight (with mounting plate)		93 kg
Operating Temperature Range		-25°C ~ 60°C
Cooling Method		Smart Air Cooling
Max. Operating Altitude		4,000 m (13,123 ft.)
Relative Humidity		0 ~ 100%
DC Connector		Amphenol HH4
AC Connector		Waterproof Connector + OT/DT Terminal
Protection Degree		IP66
Topology		Transformerless
Nighttime Power Consumption		< 3.5 W
Standard Compliance (more available upon request)		
Certificate		EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 61727, IEC 60068, IEC 61683
Grid Connection Standards		VDE-AR-N4105, EN 50549-1, EN 50549-2, RD 661, RD 1699, C10/11

¹ The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.
² Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

SUN2000-50KTL-M3 Smart PV Controller



Higher Yields

Up to 30% More Energy
with Optimizer





Active Safety

AI Powered
Active Arcing Protection



Flexible Communication

WLAN, Fast Ethernet, 4G
Communication Supported

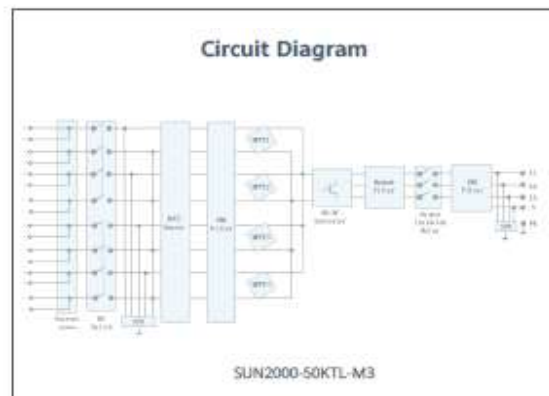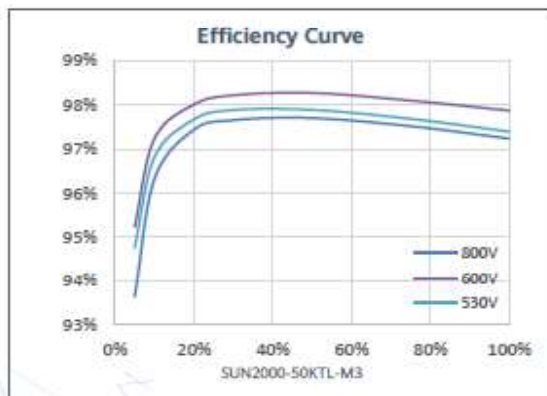

SUN2000-50KTL-M3
Technical Specification

Technical Specification		SUN2000-50KTL-M3
Efficiency		
Max. Efficiency		98.5%
European Efficiency		98.0%
Input		
Max. Input Voltage ¹		1,100 V
Max. Current per MPPT		30 A
Max. Current per Input		20 A
Max. Short Circuit Current per MPPT		40 A
Start Voltage		200 V
MPPT Operating Voltage Range ²		200 V ~ 1,000 V
Rated Input Voltage		600 V
Number of Inputs		8
Number of MPP Trackers		4
Output		
Rated AC Active Power		50,000 W
Max. AC Apparent Power		55,000 VA
Max. AC Active Power (cosφ=1)		55,000 W
Rated Output Voltage		400 Vac / 480 Vac, 3W+(N) + PE
Rated AC Grid Frequency		50 Hz / 60 Hz
Rated Output Current		72.2 A @ 400Vac, 60.1 A @ 480Vac
Max. Output Current		79.8 A @ 400Vac, 66.5 A @ 480Vac
Adjustable Power Factor Range		0.8 LG ... 0.8 LD
Max. Total Harmonic Distortion		<3%
Protection		
Input-side Disconnection Device		Yes
Anti-islanding Protection		Yes
AC Overcurrent Protection		Yes
DC Reverse-polarity Protection		Yes
PV-array String Fault Monitoring		Yes
DC Surge Arrester		Type II
AC Surge Arrester		Type II
DC Insulation Resistance Detection		Yes
Residual Current Monitoring Unit		Yes
Arc Fault Protection		Yes
Ripple Receiver Control		Yes
Integrated PID Recovery ³		Yes
Communication		
Display		LED Indicators, Bluetooth + APP
RS485		Yes
Smart Dongle		WLAN/Ethernet via Smart Dongle-WLAN-FE (Optional) 4G / 3G / 2G via Smart Dongle-4G (Optional)
Monitoring BUS (MBUS)		Yes (Isolation Transformer required)
Optimizer Compatibility		
DC MBUS Compatible Optimizer		MERC-1100/1300W-P
General Data		
Dimensions (W x H x D)		640 x 530 x 270 mm (25.2 x 20.9 x 10.6 inch)
Weight (with mounting plate)		49 kg (108.1 lb)
Operating Temperature Range		-25°C ~ 60°C (-13°F ~ 140°F)
Cooling Method		Smart Air Cooling
Max. Operating Altitude		4,000 m (13,123 ft.)
Relative Humidity		0% RH ~ 100% RH
DC Connector		Amphenol HH4
AC Connector		Waterproof Connector + OT/DT Terminal
Protection Degree		IP 66
Topology		Transformerless
Nighttime Power Consumption		≤ 5.5W
Standard Compliance (more available upon request)		
Safety		EN 62109-1/-2, IEC 62109-1/-2, EN 50530, IEC 62116, IEC 60068, IEC 61683
Grid Connection Standards		IEC 61727, VDE-AR-N4105, VDE 0126-1-1, BDEW, G59/3, UTE C 15-712-1, CEI 0-16, CEI 0-21, RD 661, RD 1699, P.O. 12.3, RD 413, EN-50438-Turkey, EN-50438-Ireland, C10/11, MEA, Resolution No.7, NRS 097-2-1, DEWA

1. The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

2. Any DC input voltage beyond the operating voltage range may result in inverter improper operating.

3. SUN2000-50KTL-M3 takes potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include P-type (mono, poly), N-type (PERC, HIT).

4. SUN2000-50KTL-M3 only supports CSI Optimizer (MERC-1100/1300W-P). The current version does not support this function and it can be upgraded to optimizer version via new inverter software version (Dec.30th, 2022). Refer to [HTTP://solar.hiwave.com/](http://solar.hiwave.com/)

SmartLogger3000A



Inteligente

Diseño de control de exportación inteligente cero



Seguro

Fácil de instalar en el sitio



Fiable

Protección contra sobretensiones

Especificaciones técnicas	SmartLogger3000A
Gestión de dispositivos	
Max. Número de dispositivos manejables	80
Interfaz de comunicación	
WAN	WAN x 1, 10 / 100 / 1000 Mbps
LAN	LAN x 1, 10 / 100 / 1000 Mbps
RS485	COM x 3, 1200 / 2400 / 4800 / 9600 / 19200 / 115200 bps, 1000 m
MBUS	MBUS x 1, 115.2 kbps, Compatible con PLC
2G / 3G / 4G ¹	LTE(FDD) : B1,B2,B3,B4,B5,B7,B8,B20 DC-HSPA+/HSPA+/HSPA/UMTS : 850/900/1900/2100 MHz GSM/GPRS/EDGE: 850/900/1800/1900 MHz ²
Entrada / salida digital / analógica	DI x 4, DO x 2, AI x 4
DO activo	12V, 100mA (conexión con relé, sensor)
Protocolo de comunicación	
Ethernet	Modbus-TCP, IEC 60870-5-104
RS485	Modbus-RTU, IEC 60870-5-103 (estándar), DL / T645
Interacción	
LED	LED Indicator x 3 - RUN, ALM, 4G
WEB	Web incrustada
USB	USB 2.0 x 1
APP	Comunicación por WLAN para la puesta en servicio
Ambiente	
Rango de temperatura de operación	-40°C - 60°C
Temperatura de almacenaje	-40°C - 70°C
Humedad relativa (sin condensación)	5% - 95%
Max. Altitud de operación	4.000 m
Alimentación	
Fuente de alimentación de CA	100 V - 240 V, 50 Hz / 60 Hz
Fuente de alimentación de CC	12 V / 24 V
Consumo de energía	Típico 8 W, Max. 15 W
Datos generales	
Dimensiones (W x H x D)	225 x 160 x 44 mm (sin orejas de montaje y antena)
Peso	2 kg
Grado de protección	IP20
Opciones de instalación	Montaje en pared, montaje en riel DIN, montaje de mesa

¹ Al pasar dentro de la caja de metal, se necesitan antenas externas.

² Para recomendada lista y datos de portadores en frecuencias compatibles, póngase en contacto con los distribuidores locales.




SOLARBLOC®



FICHA TÉCNICA SOLARBLOC® CUBIERTAS Y SUPERFICIES PLANAS
SOPORTE PREFABRICADO DE HORMIGÓN PARA PANELES SOLARES

SOLARBLOC® es un sistema patentado para el montaje de módulos solares sobre cubiertas y superficies planas.

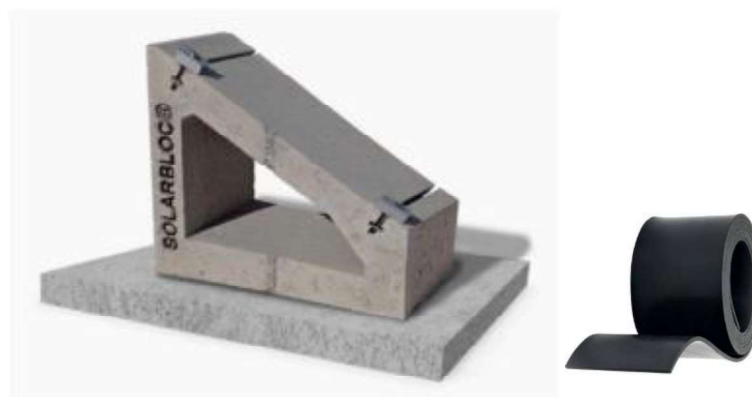

El sistema Solarbloc® permite fijar los módulos solares directamente al soporte sin utilizar estructura metálica. **Los soportes Solarbloc® se fabrican en siete grados distintos, 10°, 12°, 15°, 18°, 28°, 30° y 34°.**

Debemos elegir la inclinación del soporte más idónea teniendo en cuenta las necesidades de la instalación.

Características de SOLARBLOC®:

- Sistema de montaje FV de un sólo componente.
- Soporte auto-lastrado, fabricado en hormigón.
- Fijación del panel mediante carril incorporado al soporte.
 - Elimina la estructura metálica.
 - Elimina el lastrado de las estructuras.
- Elimina el proceso de perforado y anclajes a la cubierta.
- Acorta el tiempo de montaje de las instalaciones FV.

Centro de producción:

Fábrica: Pol. Ind La Albuera Parc. 22, C.P.060170 La Albuera (Badajoz)
Teléfono 924 480 112 – Fax 924 268 932

SOLARBLOC® es un producto diseñado, desarrollado, fabricado y patentado por PRETENSADOS DURÁN S.L.
WWW.SOLARBLOC.ES

MERC-1100/1300W-P Smart Module Controller



Long String Design
Better for C&I Scenarios



Up to 20 A Input Current
Fit All Type Module



< 5s
Module Auto-Mapping



Temperature Detection
Safety Enhanced



1V Safe Voltage Shutdown
Easier for Detection




Arc Fault Pinpoint Positioning
Along PV Cable



MERC-1100/1300W-P Smart Module Controller



Technical Specification	MERC-1100W-P	MERC-1300W-P				
Input						
Rated Input DC Power ¹	1100 W	1300 W				
Max. input voltage	125 V					
MPPT operating voltage range	12.5 – 105 V					
Max. short-circuit current (I _{sc})	20 A					
Max. efficiency	99.5 %					
Weighted efficiency	99.0 %					
Overtoltage category	II					
Output						
Max. output voltage	80 V					
Max. output current	22 A					
Output bypass ²	Yes					
Shutdown output voltage per optimizer ³	1 V					
Standards Compliance						
Safety	IEC62109-1 (class II safety)					
RoHS	Yes					
General Data						
Dimension (W x H x D)	149 mm x 104 mm x 49 mm (5.9 in. x 4.1 in. x 2.0 in.)					
Weight (including cables)	1.05 kg (2.2 lb.)					
Installation part (optional)	PV Module Frame Plate, T-shaped Bolt					
input connector	MC4					
input wire length	0.1 m (short input cable version) ⁴					
Output connector	MC4					
Output wire length	0.1 m (+), 5.1 m (-) (short input cable version) ⁴					
Operating temperature/humidity range	-40°C to +85°C ⁵ / 0%-100% RH					
Degree of protection	IP68					
Compatible Inverter	SUN2000-12/15/17/20KTL-M2 SUN2000-12/15/17/20/23/25KTL-M5 SUN2000-30/36/40KTL-M3 SUN2000-50KTL-M3					
String Configuration (Full Optimizer Configuration) [*] MERC-1100/1300W-P support full optimizer configuration only	SUN2000-12-20KTL-M2	SUN2000-12-25KTL-M5	SUN2000-30-40KTL-M3	SUN2000-50KTL-M3		
Minimum optimizers per string	6	6	6	6		
Maximum optimizers per string	25	25	25	20		
Recommend strings per inverter	12KTL 15-20KTL		12KTL 15-25KTL 30/36KTL 40KTL		4	
[*] Only one string can be connected to each MPPT. [*] The DC/AC ratio is 1.0 to 1.2 for this recommended configuration. For other ratios, refer to the user manual.	1	2	1	2		3
Maximum DC power per string [*] It is recommended that strings have equal capacity. The capacity difference between strings should < 2 kW. Otherwise, the energy yield might be adversely affected.	20,000 W		20,000 W		20,000 W	20,000 W

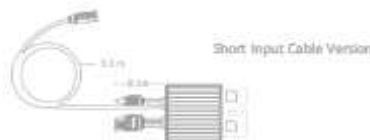

¹ The rated power of modules under standard test conditions (STC) shall not exceed the rated DC input power of optimizers. The module power can be 5% higher than the rated optimizer power.
² Failed optimizers will be bypassed so that other optimizers and inverters will not be affected.
³ When the optimizer output is an open circuit or the inverter connected to the optimizer is shut down, the default optimizer output is 1 V DC voltage.
⁴ For the short input cable version (input cable 0.1m (+/-), output cable 0.1m (+), 5.1m (-)), ensure that the PV module cables are long enough to connect to the optimizers. For split junction box module with a short cable, the long input cable version of optimizer is available (input cables: 1.2 m (+/-); positive output cable: 0.1 m; negative output cable: 2.9 m) on request.
⁵ When the operating temperature of the optimizer is 70°C to 85°C, the optimizer may shut down for overtemperature protection and report an overtemperature alarm. After the operating temperature drops to 70°C or below, the optimizer automatically recovers with no risk of damage.
⁶ The SUN2000-450/600W-P cannot be mixed with the MERC-1100/1300W-P under the same inverter.
⁷ The temperature detection function is only available on the short output cable (0.1 m).
⁸ It is allowed to connect single PV module to the MERC-1100/1300W-P.